



## FEATURES

- RDL7800 Series 8" Driving Light
- Amber or White Dynamic start-up DRL
- Blackout mounting hardware
- Includes Black cover with DRL windows
- 18 x 10W Osram LED's with a crisp 5700K colour temperature
- 1LX @ 834 metres per pair
- Multi-volt 10-30V DC input & low current draw
- 50,000 hour LED lifespan with solid state technology
- Thermal Management Technology
- Lightweight tough die-cast aluminium housing & polycarbonate lens
- Water & dust proof IP67 rated
- Over/under voltage, reverse polarity protection
- EMI/EMC radio interference approved

LED DRIVING LAMPS



THERMAL  
MANAGEMENT  
TECHNOLOGY



DYNAMIC DRL



MULTI-VOLT  
10-30 VDC



POLYCARB  
LENS



ALUMINIUM  
HOUSING



COLOUR  
TEMP



WATERPROOF



DEUTSCH  
CONNECTOR



OSRAM  
LEDS



RADIO  
INTERFERENCE  
APPROVED



7 YEAR  
WARRANTY


Upgrade your vehicle's lighting with the Roadvision Dynamilux Series 8" LED Driving Lights. Designed for style and performance, it features a dual-colour dynamic start-up DRL that adds a modern touch while improving daytime visibility. With a combination beam pattern, these lights deliver an impressive 1LX @ 834 metres per pair and a crisp 5700K colour temperature for exceptional clarity during nighttime driving. Built tough with an IP67 rating for water and dust resistance and backed by a 7-year warranty, the Dynamilux Series is made to last. Each light comes with a protective cover featuring DRL windows, offering extra durability without compromising functionality. Perfect for drivers who demand reliability, performance and style in one sleek package.

## PART NUMBERS



### RDL7800C

LED Driving Light 8" RDL7800C Series Combination Beam 10-30V  
Roadvision Dynamilux

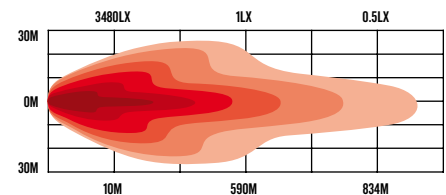

## SPECIFICATIONS

### RDL7800C


SPECIFICATIONS	RDL7800C
BEAM PATTERN	Combination
LUMENS PER LIGHT (PAIR)	9,900lm (19,800lm)
LUX @ 10M PER LIGHT (PAIR)	3,480lx (6,960lx)
BEAM DISTANCE @ 1LX PER LIGHT (PAIR)	590m (834m)
BEAM DISTANCE @ 0.5LX PER LIGHT (PAIR)	834m (1,180m)
INPUT VOLTAGE	10-30VDC
MAXIMUM WATTS	180W
NUMBER OF LEDS	18 x 10W Osram
CURRENT DRAW @ 13.8V	10.2 Amps
LENS CONSTRUCTION	Polycarbonate
HOUSING CONSTRUCTION	Die-Cast Aluminium
WIRING	4 Pin Deutsch Plug Red – Positive, Black – Negative, Yellow – Amber DRL, White – White DRL
DIMENSIONS AXBXC	220 x 80 x 229mm

# DYNAMILUX

**DYNAMIC DRL**  
AMBER OR WHITE



## LINE DIAGRAM

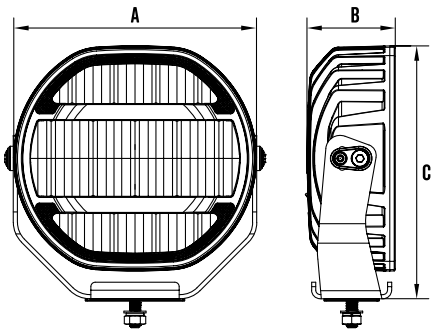

INCLUDES 1 X PROTECTIVE COVER

