



FEATURES

- S7 Stealth PRO Series 7" Driving Light
- Dynamic start-up DRL
- Includes Black cover with DRL windows
- Blackout mounting hardware
- 3W Osram LED's produce super white light close to daylight
- Multi-volt 10-30V DC input & low current draw
- 50,000 hour LED lifespan with solid state technology
- Thermal Management Technology
- Light weight tough die-cast aluminium housing & polycarbonate lens
- Water & dust proof IP67 rated
- Over/under voltage, reverse polarity protection
- EMI/EMC radio interference approved

LED DRIVING LAMPS


THERMAL MANAGEMENT TECHNOLOGY	HALO DRL RING	MULTI-VOLT 10-30 VDC	POLYCARB LENS	COLOUR TEMP	WATERPROOF	OVER/UNDER VOLTAGE PROTECTION	REVERSE POLARITY PROTECTION	DEUTSCH CONNECTOR	OSRAM LEDs	RADIO INTERFERENCE APPROVED	7 YEAR WARRANTY

Roadvision's S7 Stealth PRO Series Driving Lights deliver cutting-edge upgrades and a sleek modern appearance, making them the perfect choice for smaller SUVs and passenger vehicles. Maintaining the contemporary bezel-less design, the S7 series now features dynamic start-up Daytime Running Lights (DRL) and a stylish black cover with a dedicated DRL window, offering enhanced functionality and aesthetics. When not illuminated, the DRL seamlessly darkens, ensuring a sleek, understated look. With black mounting hardware, the S7 series utilizes 16 x 3W Osram LEDs to produce an impressive 5130lm per light and 631mts of beam penetration at 1 lux. Built to withstand the harshest conditions, these lights feature a lightweight yet tough aluminium housing and a durable polycarbonate lens. Powered by Roadvision's Thermal Management Technology, the S7 Stealth PRO Series guarantees superior performance and durability in any environment.

PART NUMBERS



RDL6701SD
7" LED Driving Light 10-30V Round 68W Spot Beam

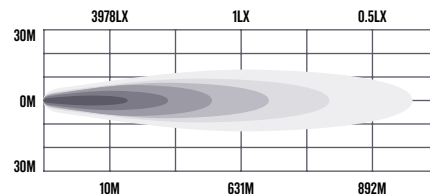

SPECIFICATIONS	RDL6701SD
BEAM PATTERN	Spot
MAXIMUM LUMENS PER LIGHT (PAIR)	5,130lm (10,260lm)
MAXIMUM LUX @ 10M PER LIGHT (PAIR)	3,978lx (7,956lx)
MAXIMUM BEAM DISTANCE @ 1LX PER LIGHT (PAIR)	631m (892m)
INPUT VOLTAGE	10-30VDC
MAXIMUM WATTS	68W
NUMBER OF LEDs	16 x 3W Osram
CURRENT DRAW @ 13.8V	4.95 Amps
LENS CONSTRUCTION	Polycarbonate
HOUSING CONSTRUCTION	Die-Cast Aluminium
WIRING	2 Pin Deutsch Plug
DIMENSIONS AXBXC	192 x 78 x 195mm

LINE DIAGRAM

