

RWL1109F SERIES

ROADVISION™



FEATURES

- RWL1109F Series LED work lamps produces a light output of 302 max lumens
- Flood Beam Pattern
- 3 x 1.5W Osram LED's produce super white light close to daylight.
- Multi-volt 10-30V DC input & super low current draw
- 50,000 hour LED lifespan with solid state technology
- Light weight tough die-cast aluminium housing & polycarbonate lens
- Simple installation
- Over/under voltage, reverse polarity protection & EMI/EMC radio interference approved

LED WORK LAMPS



ROADVISION's RWL1109F Series work / rock lamps offer uncompromised performance and energy efficiency in a compact, easy to install package. This compact work lamp is perfect for any applications where space is limited. Water and dust proof to IP67, the RWL1109F Series feature a super durable light weight die-cast housing and polycarbonate lens, allowing for worry free operation in even the toughest conditions.


PART NUMBERS



RWL1109F
LED Work Light / Rock Light 9-30V Rectangle 4.5W Flood Beam



RWL09AB
Optional 30° Mounting Base

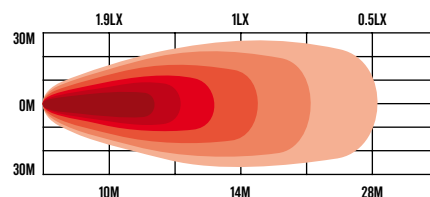

SPECIFICATIONS	RWL1109F
BEAM PATTERN	90° Flood
MAXIMUM LUMENS	302lm
INPUT VOLTAGE	10-30 VDC
MAXIMUM WATTS	4.5W
NUMBER OF LEDS	3 x 1.5W Osram
CURRENT DRAW @ 13.8V	0.4 Amps
MAXIMUM LUX @ 10M	1.9LX
MAXIMUM DISTANCE @ 1 LUX	14m
LENS CONSTRUCTION	Polycarbonate
HOUSING CONSTRUCTION	Die-Cast Aluminium
WIRING	200mm Lead
DIMENSIONS AXBXC	77 x 44 x 22mm

LINE DIAGRAM - RWL1109F

