



FEATURES

- Mini Revolver 5 function 360° high intensity beacons
- Single, double, triple, quad & simulated rotating flash patterns
- Multi-volt 10-30V input & low current draw
- 64 SMD LED's produce 15W
- White LED light source allows simple lens colour change
- 100,000 hour rated LED lifespan
- Maintenance free solid state technology
- Impact resistant polycarbonate lens & housing
- Waterproof IP67 rated and vibration proof
- Available in 3 hole fixed or magnetic mounts
- EMC, ECE R10 & SAE class 1 approved (Amber)



Roadvision's RB132 Series mini 360° high intensity beacons are at the forefront of automotive lighting technology... Featuring state-of-the art LED technology, the REVOLVER Series of Roadvision LED beacons are specifically designed and engineered to not only meet, but exceed Australian and international regulations. With an impact resistant polycarbonate lens & housing, the RB132 Series are built to last in even the toughest conditions. Featuring 64 SMD LED's, the white LED light source enables a quick and easy lens colour change to blue, red or green. With 5 selectable flash patterns, single, double, triple, quad & simulated rotating - the RB132 Series are the perfect LED beacon for a wide range of industrial applications.

PART NUMBERS



RB132Y
Mini Beacon LED 10-30V 5 Flash Patters Amber Fixed Mount



RB132MY
Mini Beacon LED 10-30V 5 Flash Pattern Amber Magnetic Mount



SPECIFICATIONS

| | RB132Y | RB132MY |
|-----------------------|-------------------------------------|-------------------------------------|
| Function | 10 Selectable Flash Patterns | 10 Selectable Flash Patterns |
| Light Source | 64 SMD LED's | 64 SMD LED's |
| Flash / Rotation Rate | 5 Flash Patterns | 5 Flash Patterns |
| Dimensions | 130x102mm | 130x104mm |
| Current Draw Amps | 1.1A @ 13.8V | 1.1A @ 13.8V |
| Mounting Type | 3 Hole Fixed 103mm Centre to Centre | Magnetic Mount |
| Wiring | 500mm Sheathed | 2500mm Lead with Cig.Plug |
| Approvals | EMC, ECE R10 & SAE class 1 approved | EMC, ECE R10 & SAE class 1 approved |

SPARE PARTS & ACCESSORIES



RL132B
Blue Lens Suit RB132 Series



RL132G
Green Lens Suit RB132 Series




RL132R
Red Lens Suit RB132 Series

FLASH PATTERN OPERATION

For flash pattern change: Momentarily apply +VDC to brown wire (fixed model) or by pressing pattern switch on cigarette lighter switch (magnetic model):

- 0.5 Seconds for next pattern
- 2.5 Seconds for flash pattern #1



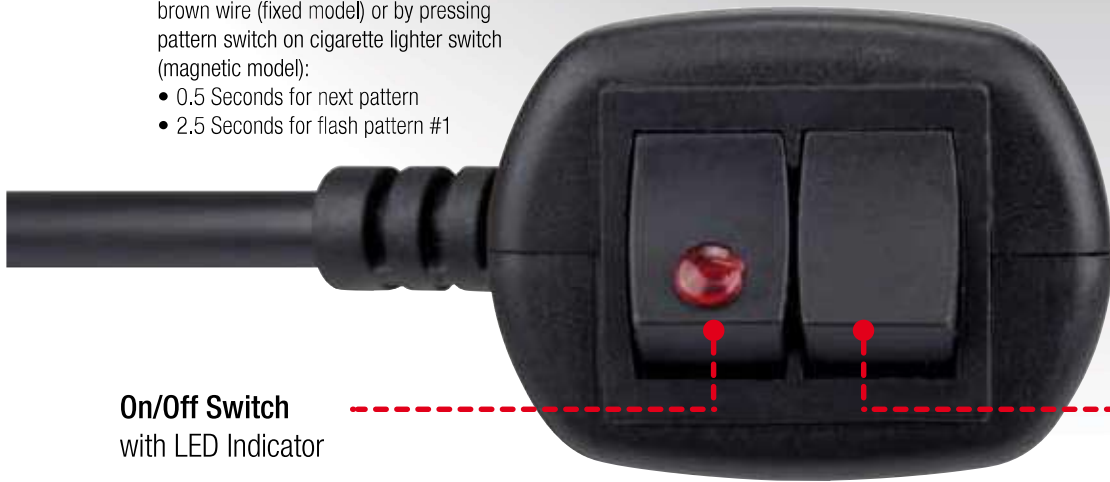


On/Off Switch
with LED Indicator

Cigarette lighter switch only available in magnetic mount

Flash Pattern Switch:
Momentarily push switch to change flash patterns

LINE DIAGRAM

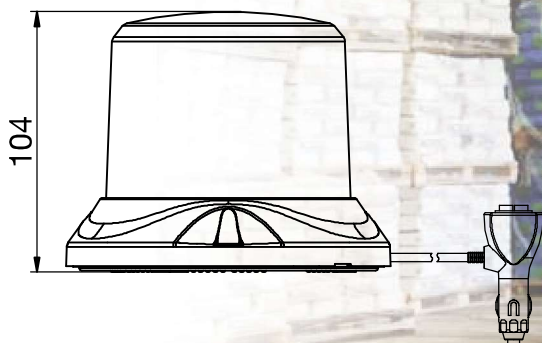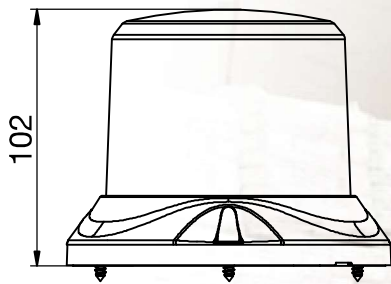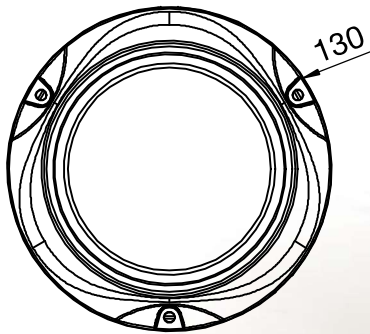

FLASH PATTERNS

| | |
|---|-----------------------------|
| 1 | Single |
| 2 | Double |
| 3 | Triple |
| 4 | Quad |
| 5 | Simulated Rotating (140rpm) |

